

The T1 GYS AUTO is a three phase MIG-MAG, with torch connector, recommended for welding steel, stainless steel, aluminium and for MIG brazing of high-tensile strength steels with CuSi and CuAl wires (ideal for car body repairs).

## Synergic Mode

• The machine determines the optimum wire speed by selecting :

- the type of wire
- the wire diameter
- the welding current



## Spool Gun connector

The Spool Gun torch is ideal for car body repairs of aluminium, AISi5 and AISi12.

## 4 Drive rolls motor

Suitable for ø200mm and ø300mm wire reels (15kg max).


## Saving welding parameters

Memory save feature for each torch and activation of the 'last used' welding parameters (wire diameter, wire type & mode).

## 3 Welding modes available

- Standard (2T)
- Spot
- Delay

## + PRODUIT

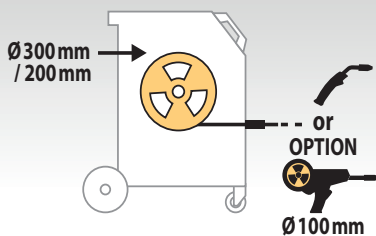

**Upgradeable** - the T1 GYS AUTO can be fitted with a Spool Gun torch. This motorised torch is suitable for ø100mm wire reels of aluminium, stainless steel, copper and steel in ø0.8mm.

- Ideal for soft wire such as the AISi5 or AISi12 (recommended for car body repairs)
- Ease of use : adjusting the wire speed on the Spool Gun torch directly.










## Accessories

Delivered with:  
- 1 torch 150A - 3m  
- 1 earth clamp 200A - 3m  
(regulator not included)

Optional Spool Gun (ref.041486)

CE - EN 60974-1

50/60hz	-AM-	min▷max	ø mm	ømm				équipé d'origine / original equipment / originalausstattung / equipamiento de fabrica		EN60974-1 (40°C)		cm/kg	 Protected & compatible POWER GENERATOR (+/- 15%)	 Spool Gun
				100	200	300				I <sub>A</sub> (60%)	X% (I <sub>z</sub> max)			
400V	10A	15▷200A	0.6-1.0		✓	✓		0.6 - 0.8	0.8	110A	150A 25%	47x77x79 55	5 kVA	Option
230/400V	16/10A		